宁波昊越纺织科技有限公司

NINGBO HAOYUE TEXTILE CO.,LTD.

SKN-2006B 型 空气捻接器

Air Splicer

型号 / Model	SKN-2006B 型 Model SKN-2006B
适用范围 / Application	锦纶-6、锦纶-66 帘子线和涤纶帘子线 Polyamide-6, polyamide-66 cord and polyester cord
捻接范围 / Splicing Range	Dtex200~Dtex2500 初捻丝、两股、三股 Dtex200-Dtex2500 primary twist filament, two-ply and three-ply yarn
捻接强力 / Splice Strength	75%~85%（和原丝比较） 75%-85% (compared to raw fiber)
要求气压 / Air Pressure	>0.75 Mpa Required air pressure: >0.75 MPa

特点：专为帘子线行业研发，捻接帘子线可达到出口标准；采用循环工艺，无需定长准确，大幅节省上筒时间、提高织机效率，减少筒脚并加快筒管周转，使用成本约半年至一年即可收回。

Features: Specially designed for the cord industry, the spliced cord meets the export standard. The cycling process removes the fixed-length accuracy requirement, saves bobbin loading time, improves loom efficiency, reduces cutting remnants and speeds up bobbin turnover; the payback period is about 6 months to one year.



宁波昊越纺织科技有限公司

NINGBO HAOYUE TEXTILE CO.,LTD.

黑板展示 / Splice Samples

SKN-2006B 型 空气捻接器（Air Splicer）

安装场景 / Installation



捻接器安装于帘子布织机纱架

Installed on cord fabric loom creel



捻接器安装于帘子线直捻机

Installed on cord direct twisting machine



车间筒纱排布

Yarn bobbins in workshop



筒纱成品存放

Finished bobbins in storage

帘子线样板 / Cord Samples

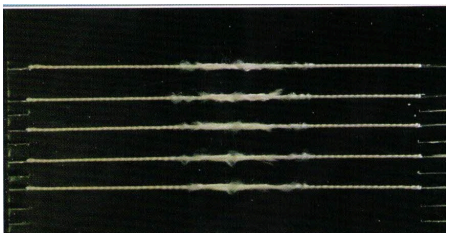

锦纶帘子线 Dtex840/2

Nylon cord Dtex840/2

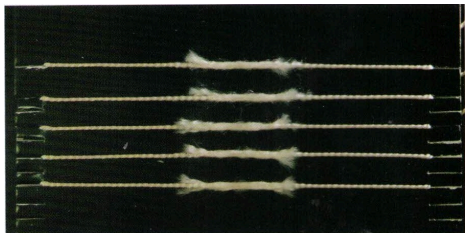

锦纶帘子线 Dtex1260/2

Nylon cord Dtex1260/2

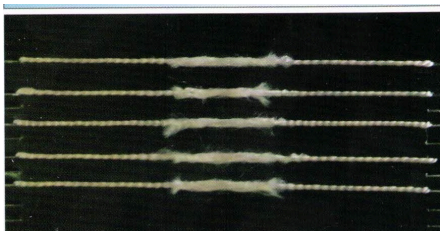

锦纶帘子线 Dtex1680/2

Nylon cord Dtex1680/2

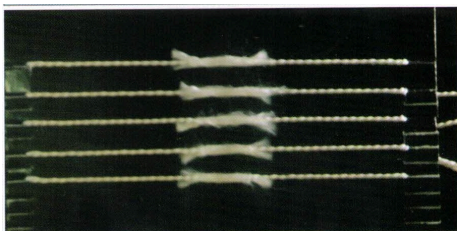

锦纶帘子线 Dtex1890/2

Nylon cord Dtex1890/2